

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/000121 A1

- (51) International Patent Classification⁷: **A61B 6/04**
- (21) International Application Number:
PCT/CA2003/000885
- (22) International Filing Date: 12 June 2003 (12.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2,391,133 21 June 2002 (21.06.2002) CA
- (71) Applicant (for all designated States except US): **SUN-
NYBROOK AND WOMEN'S COLLEGE HEALTH
SCIENCES CENTRE [CA/CA]; 2075 Bayview Avenue,
Toronto, Ontario M4N 3M5 (CA).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **YANG, Jiwei
[CA/CA]; 6 Coral Cove Crescent, North York, Ontario
M3A 1G8 (CA). MAWDSLEY, Gordon [CA/CA]; 42
Cobblestone Drive, North York, Ontario M2J 2X7 (CA).
YAFFE, Martin [CA/CA]; 25 Kimbark Boulevard,
Toronto, Ontario M5N 2X6 (CA).**
- (74) Agent: **MCMILLAN, Ian; Bereskin & Parr, 40 King
Street West, 40th Floor, Toronto, Ontario M5H 3Y2 (CA).**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments
- For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **METHOD AND APPARATUS FOR MEASURING THE THICKNESS OF COMPRESSED OBJECTS**

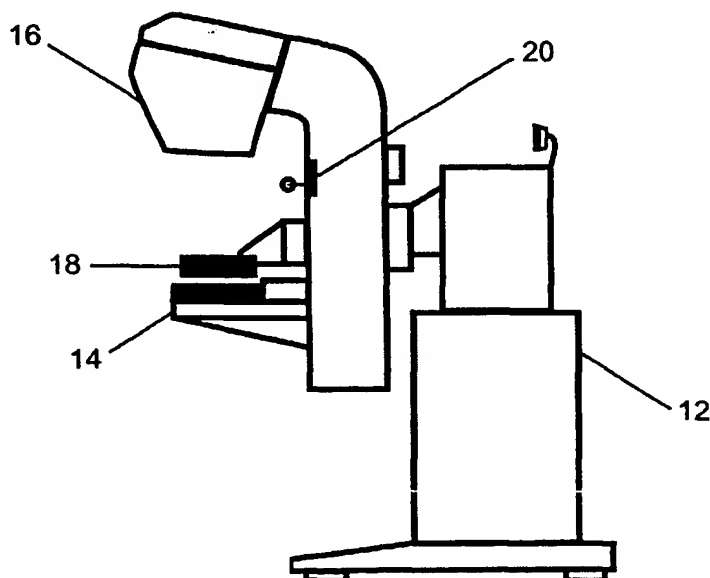

(57) Abstract: A method and apparatus for determining a degree of deflection in a breast compression plate. The mammography apparatus further includes an optical measuring device. The method and apparatus involve (a) providing a pattern on the breast compression plate, the pattern being imaged by the optical measuring device, and having a plurality of local pattern indicia; (b) adjusting the breast compression plate to a selected height; (c) imaging the breast compression plate using the optical measuring device to provide an image of the pattern, the image having a plurality of local image indicia including an associated local image indicia for each local pattern indicia in the plurality of local pattern indicia; and (d) for each local pattern indicia in the plurality of local pattern indicia, determining an associated local deflection of the breast compression plate from the associated local image indicia.

WO 2004/000121 A1

**Title: Method and Apparatus for Measuring the Thickness of
Compressed Objects**

FIELD OF THE INVENTION

5 This invention relates in general to a method and apparatus for measuring the thickness of compressed objects, and more specifically relates to a method and apparatus for determining the degree of deflection of a breast compression plate in a mammography apparatus.

BACKGROUND OF THE INVENTION

10 In conventional mammography, a woman places her breast on a breast support plate. A detector is typically mounted under the breast support plate. This detector is sensitive to x-rays. A breast compressor plate that is transparent to light and x-rays presses against the top of the breast to flatten it and to prevent any movement during the mammography process. An x-ray
15 source is then turned on to image the breast, which is between the breast support plate and the breast compression plate.

 The transmitted x-ray intensity through the breast is dependent on both the composition of the breast and its local thickness. Most current mammography machines have thickness indicators, which are imprecise.
20 These thickness indicators do not show true breast thickness if either the breast support plate or the compression plate bend or flex. This, in turn, will affect the accuracy and precision of the images of the breast obtained.

 Techniques for determining the degree of flex of the breast compression plate have been devised. For example, see Burch, A. and Law,
25 J., *A Method for Estimating Compressed Breast Thickness During Mammography*. Br J Radiol 68, (1995) 394-399, which discloses using the magnification of lead markers placed on top of the compression plate. However, this method requires that all the markers be shown in the image, and does not measure the flexing of plastic plates.

30 Accurate measurement of compressed breast thickness is an important factor in determining volumetric breast density. It is also an

important factor in determining dose calculation (for example, Wu. X., Gingold E. L. Barnes G. T., Tucker D m Normalized average glandular dose in Mo/Rh and Rh/Rh target-filter mammography radiology 1994 193 at 83 to 89; Law, J., editor: *The Commissioning and Routine Testing of Mammographic X-ray System*, Institute of Physical Sciences in Medicine, York UK, (1994) 59; 5 Dance, D.R.: *Monte Carlo Calculation of Conversion Factors for the Estimation of Mean Glandular Breast Dose*, Phy Med Biol, 35, (1990) 1211-1219. The measurement of actual thickness provided by commercial mammography can be as much as one centimeter off the actual thickness 10 due to deflection of the breast compression plate.

Accordingly, a mammography apparatus and method that improves the accuracy of measuring breast thickness is desirable.

SUMMARY OF THE INVENTION

An object of an aspect of the present invention is to provide an 15 improved method of determining a degree of deflection in a breast compression plate.

In accordance with an aspect of the present invention, there is provided a method of determining a degree of deflection in a breast compression plate of a mammography apparatus. The mammography 20 apparatus further includes an optical measuring device. The method comprises: (a) providing a pattern on the breast compression plate, the pattern being imagable by the optical measuring device, and having a plurality of local pattern indicia; (b) adjusting the breast compression plate to a selected height; (c) imaging the breast compression plate using the optical 25 measuring device to provide an image of the pattern, the image having a plurality of local image indicia including an associated local image indicia for each local pattern indicia in the plurality of local pattern indicia; and (d) for each local pattern indicia in the plurality of local pattern indicia, determining an associated local deflection of the breast compression plate from the 30 associated local image indicia.

An object of a further aspect of the present invention is to provide an improved mammography apparatus for imaging breasts.

In accordance with a further aspect of the present invention, there is provided an apparatus comprising (a) a breast compression plate for
5 compressing a breast to be imaged, the breast compression plate having a vertical adjustment means for adjusting the height of the breast compression plate to a selected height, and an optically-readable pattern; (b) a breast imaging means for imaging the breast compressed by the compression plate;
10 (c) an optical measurement means for generating an image of the optically-readable pattern; and, (d) calculating means for determining a deflection of the breast compression plate from the selected height from the image of the optically readable pattern.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of preferred aspects of the invention is
15 provided herein below with reference to the following drawings, in which:

Figure 1, in a perspective view, illustrates a mammography machine in accordance with the preferred embodiment of the present invention;

Figure 2 is a schematic drawing showing the optical axis of a
20 CCD (Charge-Coupled Device) camera, and the orientation of this optical axis relative to a horizontal plane having a grid-like pattern;

Figure 3, in a schematic view, illustrates the optical pattern of one of these squares of the pattern of the horizontal plane of Figure 2;

Figure 4, in a graph, plots the pattern shift of different rows of
25 the grid pattern of Figure 2 against thickness; and,

Figure 5 in a three-dimensional graph, plots thickness in centimeters against grid column and row location.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS OF THE INVENTION

Referring to Figure 1, there is illustrated in a perspective view, a mammography machine 12. The mammography machine 12 includes a breast support plate 14, a breast compression plate 18, an x-ray tube 16 and a camera 20. In operation, the x-ray tube 16 projects x-rays through the breast compression plate 18, which is transparent to light and x-rays, through the breast, and through the breast support plate 14. The breast compression plate 18 may be vertically adjusted to accommodate breasts of different dimensions. The breast support plate 14 includes a detector (not shown) that is sensitive to the x-rays. Variation in the density of the breast will have an effect on the x-rays traveling through the breast, which will affect the image left on the detector in the breast support plate 14. These signal variations may then be examined for possible tumors or other conditions. As discussed above, the transmitted x-ray intensity through the breast depends both on the composition of the breast and the thickness of the breast. Accordingly, to properly interpret the image, the thickness of the breast must be known. To accurately know the thickness of the breast, the deflection of the breast compression plate 18 must also be known. Deflection of the breast support plate 14 is much less of a concern, as this plate is comparatively rigid.

According to an embodiment of the present invention, a grid-like pattern is provided on the top of the breast compression plate 18. Referring to Figure 2, the orientation of this camera 20 is shown relative to a grid-like pattern 22 on the upper side of breast compression plate 18. The camera 20 has an optical axis 24 that forms an angle α relative to the vertical axis 26 normal to the horizontal plane of the breast compression plate 18 bearing the grid-like pattern 22. As will be apparent to those skilled in the art, when the grid-like pattern 22 is moved up or down the vertical axis, this will change the image of each intersection point 28 generated by the camera 20. This is illustrated in more detail in Figure 3 with respect to one square of the grid-like pattern 22, and specifically with respect to point 28₀.

Referring to Figure 3, there is illustrated in a not-to-scale schematic view, how the image on the camera changes based on flexion or other vertical movement of the breast compression plate 18. The location of the lens of the camera 20 is marked 20a in Figure 3. A line of sight 30 connects intersection point 28₀ with lens location 20a. This line 30 is then extended to an image plane 32. The intersection of the line 30 with the image plane 32 marks the image point 34₀ corresponding to intersection point 28₀. The intersection point 28₀ is displaced from the optical axis by an initial distance A. The angle between line of sight 30 and optical axis 24 is θ_2 .

10 Say that the breast compression plate 18 is flexed upwardly by a breast compressed between the breast compression plate 18 and the breast support plate 14. This upward displacement will vary from intersection point 28 to other intersection points 28 based on fluctuation in breast thickness and compressibility. However, for the particular intersection point 28₀ with which
15 Figure 3 is concerned, the deflection is by an amount T in a direction normal to the horizontal plane of the breast compression plate 18. As a result of the deflection of intersection point 28₀ to a new position shown as 28_d, a new line of sight 36 to the lens position 20a is generated. When extended back to the image plane 32, this line of sight 36 intersects at new image point 34_d. This
20 new image point 34_d is a shift S from the initial image point 34₀ and is displaced from the optical axis 27 by a distance S₀. Line of sight 36 is at an angle θ_1 to optical axis 24.

As shown in the drawing, the lens position 20a is defined by angle α , as well as by distances L and L₀, both of which distances are
25 measured parallel to the optical axis 24. Distance L is the distance from the camera lens 20a to the plane of the displacement point 28₀. L₀ is the distance from the camera lens 20a to the image plane 32. The parameters T₀, S₀ and θ_2 are fixed relative to each intersection point 28, although these parameters change for different intersection points 28. The parameters θ_1 , S and T
30 change depending on the degree of flexing of the breast compression plate. However, as shown below, the thickness T varies linearly with the shift S.

From trigonometry, $\tan(\theta_2) = A/L = (S_0 - S)/L_0$ and
 $\tan(\theta_1) = [A + T_0 * \tan(\alpha)]/(L - T_0) = S_0/L_0$

$$A/L = (S_0 - S)/L_0 \quad (1)$$

and

5 $[A + T_0 * \tan(\alpha)]/(L - T_0) = S_0/L_0 \quad (2)$

Finally, based on trigonometry and then solving for T_0 using equations (1) and (2)

$$T = T_0 / \cos \alpha = S(L/L_0)[S_0 \cos \alpha / L_0 + \sin \alpha] \quad (3)$$

These results were also verified empirically by changing the
10 position of the breast compression plate. The shift of grid marks on the image plate was then mapped as a linear function of the height of the breast compression plate 18 for each X, Y coordinate of the grid pattern. Referring to Figure 4, the relative shift for intersection points 28 in a first row 22a, a third row 22b and a fifth row 22c of the grid pattern 22 are shown. Clearly, θ_2
15 increases with the horizontal distance from the camera such that for the fifth row 22c θ_2 is larger than θ_2 is for the first row 22a. θ_2 for the third row 22b is smaller than θ_2 for the fifth row 22c, and is larger than θ_2 for the first row 22a. As a result, the shift S for intersection points 28 in the fifth row 22c will be greater than the shift S for intersection points 28 in the first row 22a. However,
20 in both cases there is a linear relation between the shift S and the thickness T. This is clearly reflected in the lines plotted in the graph of Figure 4. Accordingly, the thickness at an individual intersection point 28 can be computed from an image of the grid pattern 22 taken along with each mammographic study.

25 Referring to Figure 5, there is illustrated in a three-dimensional graph, a thickness map. The thickness map plots the displacement between the breast compression plate 18 and the breast support plate 14 at different X and Y positions on the grid. This displacement can be determined from the image of the grid at these X and Y positions in accordance with the above-
30 described method.

Other variations and modifications of the invention are possible. For example, other non-grid patterns may be provided on the top of the breast compression plate to enable its deflection to be determined. All such applications, modifications or variations are believed to be within the sphere
5 and scope of the invention as defined by the claims appended hereto.

Claims:

1. A method of determining a degree of deflection in a breast compression plate of a mammography apparatus, the mammography apparatus further including an optical measuring device, the method
5 comprising:

(a) providing a pattern on the breast compression plate, the pattern being imagable by the optical measuring device, and having a plurality of local pattern indicia;

(b) adjusting the breast compression plate to a selected height;

10 (c) imaging the breast compression plate using the optical measuring device to provide an image of the pattern, the image having a plurality of local image indicia including an associated local image indicia for each local pattern indicia in the plurality of local pattern indicia; and

(d) for each local pattern indicia in the plurality of local pattern
15 indicia, determining an associated local deflection of the breast compression plate from the associated local image indicia.

2. The method as defined in claim 1 wherein the breast support plate is adjustable, the method further comprising

moving the breast support plate to a plurality of different
20 positions; and

for each position in the plurality of different positions, determining a position-specific image of the pattern, the position-specific image including an associated position-specific local image indicia for each local pattern indicia at each position in the plurality of positions;

25 wherein step (c) comprises, for each local pattern indicia in the plurality of local pattern indicia, determining the associated local deflection of the breast

support plate by correlating the associated degree of shift in the associated local image indicia with an associated position-specific local image indicia.

3. The method as defined in claim 1 wherein the pattern is a two-dimensional radio-lucent pattern.

5 4. The method as defined in claim 3 wherein the pattern is a grid, and each local pattern indicia is a point on the grid.

5. The method as defined in claim 2 wherein the step of determining a position-specific image of the pattern for each position in the plurality of different positions, comprises imaging the breast support plate at
10 each different position using the optical measuring device to provide the position-specific image of the pattern.

6. A mammography apparatus for imaging breasts, the apparatus comprising

a breast compression plate for compressing a breast to be
15 imaged, the breast compression plate having a vertical adjustment means for adjusting the height of the breast compression plate to a selected height, and an optically-readable pattern;

a breast imaging means for imaging the breast compressed by the compression plate;

20 an optical measurement means for generating an image of the optically-readable pattern; and,

calculating means for determining a deflection of the breast compression plate from the selected height from the image of the optically readable pattern.

25 7. The mammography machine as defined in claim 5 wherein the pattern has a plurality of local pattern indicia;

the image has a plurality of local image indicia including an associated local image indicia for each local pattern indicia in the plurality of local pattern indicia; and

5 for each local pattern indicia in the plurality of local pattern indicia, the data processing means is operable to determine an associated local deflection of the breast compression plate from the associated local image indicia.

8. The method as defined in claim 6 wherein the pattern is a two-dimensional radio-lucent pattern.


10 9. The method as defined in claim 6 wherein the pattern is a grid, and each local pattern indicia is a point on the grid.

ABSTRACT OF THE DISCLOSURE

A method and apparatus for determining a degree of deflection in a breast compression plate. The mammography apparatus further includes an optical measuring device. The method and apparatus involve (a) providing
5 a pattern on the breast compression plate, the pattern being imagable by the optical measuring device, and having a plurality of local pattern indicia; (b) adjusting the breast compression plate to a selected height; (c) imaging the breast compression plate using the optical measuring device to provide an image of the pattern, the image having a plurality of local image indicia
10 including an associated local image indicia for each local pattern indicia in the plurality of local pattern indicia; and (d) for each local pattern indicia in the plurality of local pattern indicia, determining an associated local deflection of the breast compression plate from the associated local image indicia.

1/5

Figure 1

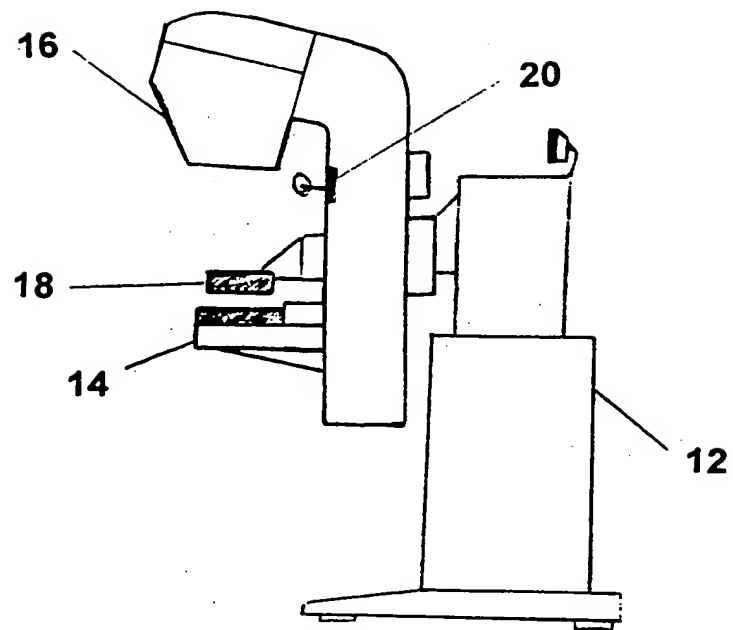

2/5

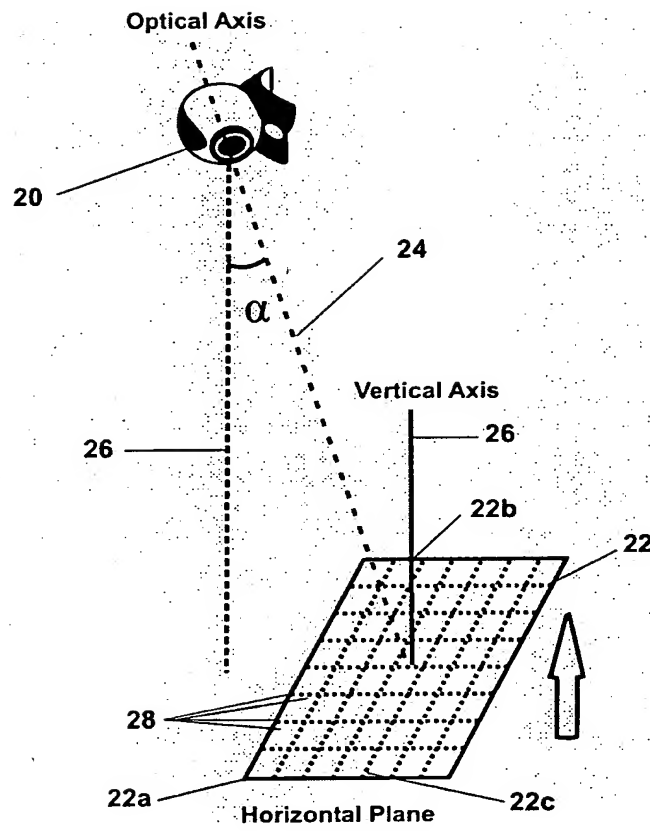


FIG. 2

3/5

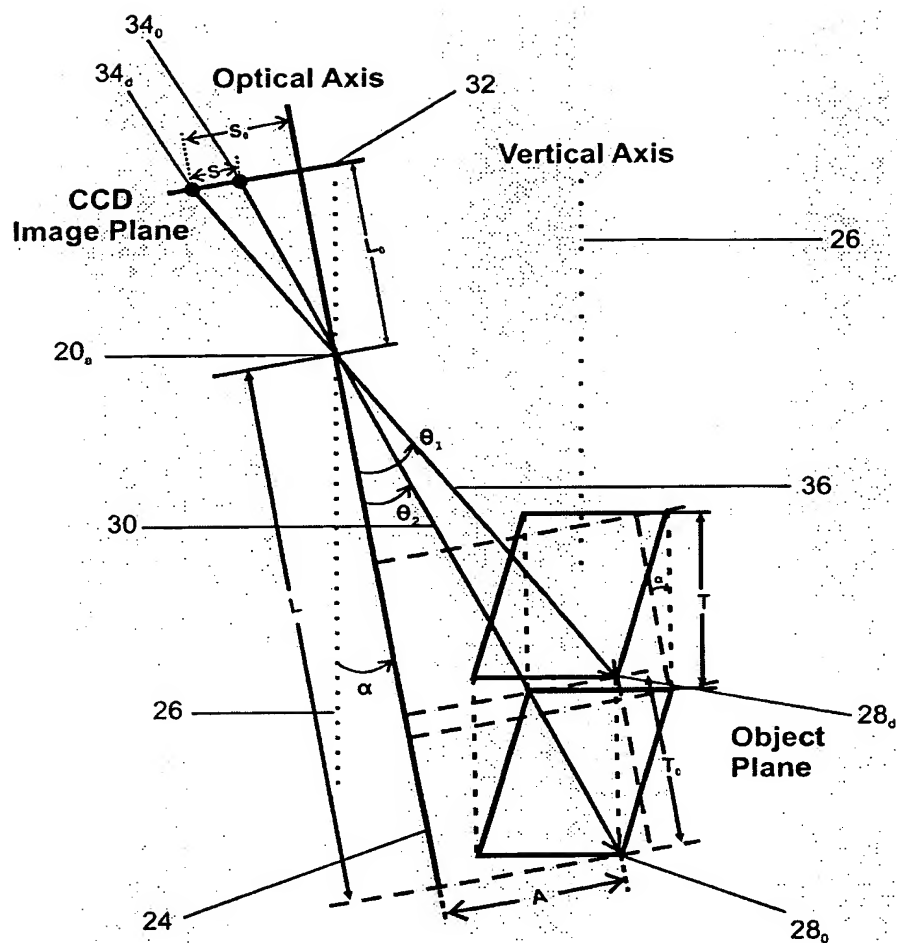


FIG. 3

4/5

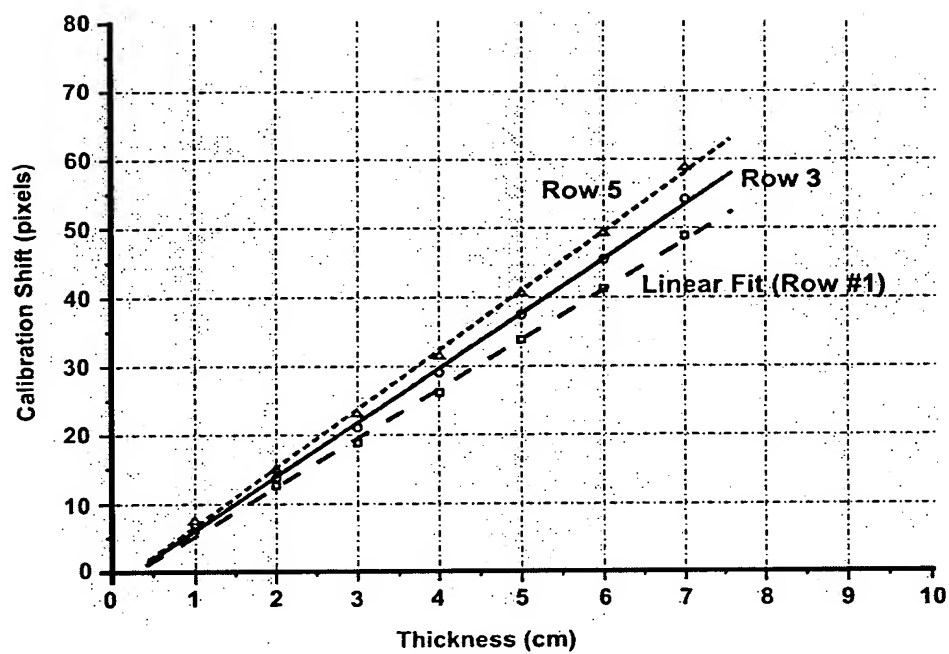


FIG. 4

5/5

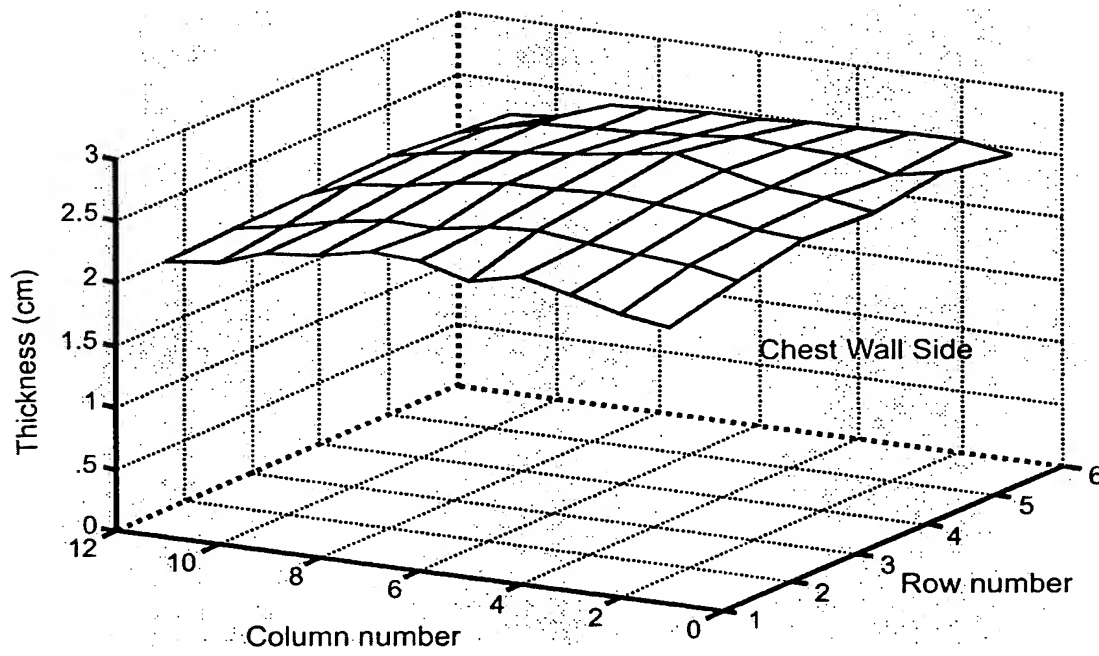


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/00885

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B6/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B G01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/057832 A1 (OOSTERLINCK ANDRE J J ET AL) 16 May 2002 (2002-05-16) column 1, paragraph 5; claim 1; figure 1 ---	
A	BURCH A; LAW J: "A method for estimating compressed breast thickness during mammography" THE BRITISH JOURNAL OF RADIOLOGY, vol. 68, no. 808, April 1995 (1995-04), pages 394-399, XP008022400 England cited in the application * whole article * -----	1-9

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

2 October 2003

Date of mailing of the international search report

23/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lommel, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/00885

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002057832	A1	16-05-2002	
		AU 712090 B2	28-10-1999
		AU 3085297 A	07-01-1998
		BR 9709679 A	11-01-2000
		EP 1009969 A1	21-06-2000
		IL 127534 A	26-08-2001
		JP 2000512012 T	12-09-2000
		NO 985746 A	12-02-1999
		WO 9747942 A1	18-12-1997
		KR 2000016663 A	25-03-2000
<hr/>			